

# **M**KEMBLA Copper Tube

# TO EUROPEAN STANDARD BSEN 1057

### **USAGE**


- Drinking Water
- Hot/Cold
- Sanitation
- Central Heating
- Gas
- General Engineering

www.kembla.com.au







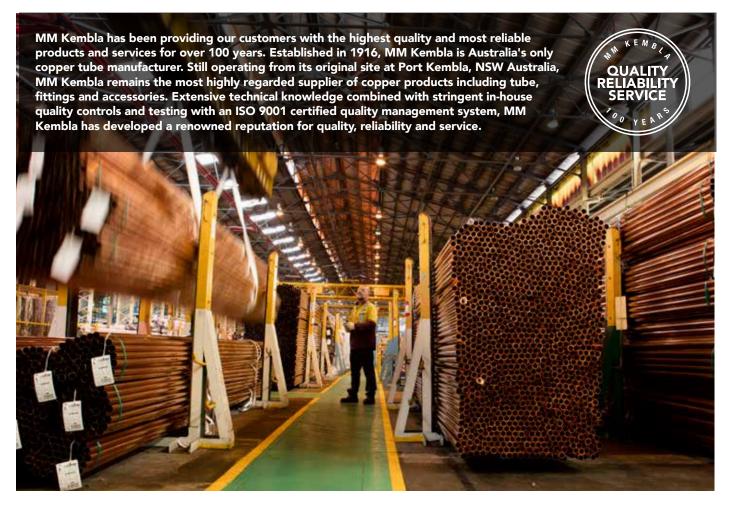

### **COPPER TUBE**

KEMBLA® copper tube is manufactured to a variety of international standards, including Australian, British/European, American and New Zealand, and is suitable for different applications such as plumbing, gas, air conditioning, refrigeration, medical gas, and general engineering applications.

The MM Kembla EN 1057 product range is suitable for drinking water purposes, both hot and cold, sanitation, central heating, gas and general engineering applications. The Kembla range is available in half hard and hard drawn tempers and is supplied in diameters from 15mm to 267mm diameter, and in a variety of wall thicknesses to meet the old Table X and Table Y requirements. Standard lengths of 5.8m are manufactured to facilitate ease of containerisation and stock of EN 1057 is held in Port Kembla, Australia.

MM Kembla has been supplying EN 1057 for over 50 years and is the market leader throughout South East Asia. MM Kembla also exports to distributors in many countries around the world for immediate delivery.

All tubes are fully certified by testing authorities in Australia, Hong Kong, Singapore, Malaysia, the Middle East and the United Kingdom and are quaranteed with a 25 Year Warranty.

All KEMBLA® tubes are lead-free and meet the stringent testing requirements of AS 4020: Materials in Contact with Drinking Water, of which a Certificate of Conformity is shown on our website.



# MEMBLA Copper Tube

KEMBLA® EN1057 COPPER TUBE (MARKED AS TABLE X)												
PRODUCT CODE	OUTSIDE DIAMETER (mm)	WALL THICKNESS (mm)	SAFE WORI ANNEALED (kPa)	KING PRESSURE* AS SUPPLIED (kPa)	WEIGHT/ LENGTH** (kg/5.8m)	LENGTHS/ MASTER BUNDLE	LAGG KEMLINE	ED SIZES KEMLAG				
T20942	15#	0.7	4500	5870#	1.63	200	✓	✓				
T14274	22#	0.9	3920	5120#	3.09	100	✓	✓				
T14312	28#	0.9	3060	3990#	3.98	50	✓	✓				
T14215	35	1.2	3270	5150	6.61	50	✓	✓				
T63593	42	1.2	2710	4270	7.98	50	✓	✓				
T21972	54	1.2	2090	3300	10.33	30	✓	✓				
T82474	66.7	1.2	1690	2660	12.81	25	✓					
T62228	76.1	1.5	1850	2920	18.24	20	✓					
T17265	108	1.5	1300	2040	26.04	10	✓					
T84302	133	1.5	1050	1650	32.15	10						
T82432	159	2.0	1170	1850	51.18	5						
T20105	219	3.0	1280	2010	105.61	1						
T20415	267	3.0	1050	1650	129.08	1						

KEMBLA® EN1057 COPPER TUBE (MARKED AS TABLE Y)												
PRODUCT CODE	OUTSIDE DIAMETER (mm)	WALL THICKNESS (mm)	SAFE WORK ANNEALED (kPa)	ING PRESSURE* AS SUPPLIED (kPa)	WEIGHT/ LENGTH** (kg/5.8m)	LENGTHS MASTER BUNDLE	LAGGI KEMLINE	ED SIZES KEMLAG				
T14150	15#	1.0	6570	8570#	2.28	200	1	1				
T76640	22#	1.2	5310	6920#	4.07	100	✓	1				
T91224	28#	1.2	4120	5370#	5.24	50	✓	1				
T19372	35	1.5	4120	6490	8.19	50	✓	1				
T19364	42	1.5	3410	5370	9.90	50	✓	1				
T54150##	54	1.5	2629	4143	12.83	25	✓	1				
T51861	54	2.0	3540	5580	16.95	25	✓	/				
T52931	66.7	2.0	2840	4480	21.09	25	✓					
T65641	76.1	2.0	2480	3910	24.15	20	✓					
T23043	108	2.5	2180	3440	42.99	10	✓					
T14567	133	2.0	1410	2210	42.70	10						
T14335	159	3.0	1770	2790	76.27	5						

<sup>\*</sup> Based on annealed temper at 65°C. \*\* Based on nominal diameter and thickness. \* Manufactured in half hard temper, all other sizes are hard drawn. \*\* Developed and suitable for use with 54mm EN1254 KemPress Fittings and marked as "EN1057 KEMPRESS"

### **TECHNICAL SUPPORT**

MM Kembla is renowned as one of the world's leading experts for technical support regarding copper tube and fittings. We invite hydraulic consultants, engineers, distributors and installation contractors to visit our website where we provide a comprehensive range of technical information.



# CONFORMIT

# SI CERTIFICATE

## PRODUCT LISTING SCHEME

**Certificate Number** 

STL-COC-Z0022

Issue No: 01

This Certificate is awarded to the following product(s) which has / have complied with the requirements of the listed standard(s).

Applicant : Liang Chew Hardware Pte Ltd

133 Kitchener Road Singapore 208517

**Product**: Copper Tubes

Brand / Model : KEMBLA / PIPCX-K & PIPCY-K (Table X & Table Y)

Detail : Diameter (mm): 15 to 28 (Half-Hard)

Diameter (mm): 35 to 159 (Hard)

Test Standard(s) : BS EN 1057: 2006 and AS/NZS 4020: 2018 Appendix

ιН.

Product conformity Certificates are awarded on the basis of an assessment of the following type-test report(s):

2322316/01-OYC dated 25 Apr 2023, 2322316/03-CPC dated 10 May 2023

Date of Original Issue : 10-May-2023

Date of Last Revision : -

Date of Expiry : 09-May-2025

Head, Certification

Singapore Test Lab Pte Ltd

Page 1 of 1

This Certificate is part of a full report and should be read in conjunction with it. This Certificate remains the property of Singapore Test Lab Pte Ltd and shall be returned upon request. The use of this Certificate is subjected to the Terms and Conditions of Singapore Test Lab Pte Ltd. The manufacturer is solely responsible for the compliance of any product that has the same designation as the product type-tested.



Singapore Test Lab Pte Ltd certifies according to ISO / IEC 17065

